


Reference No.: 6.29

## Tempering furnace

The tempering furnace facilitates the tempering of foam materials and composite materials. The equipment allows precisely co-ordinated heating and drying on the edging. This is achieved by a PLC with pre-set modes, of indirect heating by a modulated burner system and by a circulating system that is designed for even calorific input with low spreading.

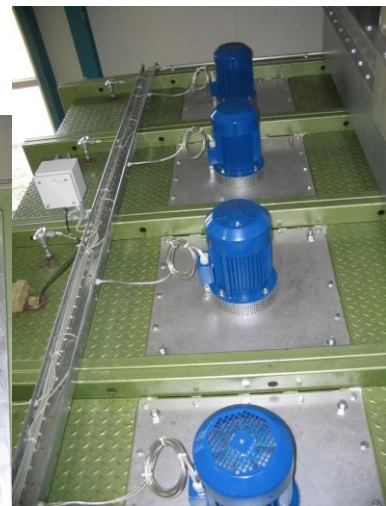

### Technical data:

Max heating capacity:	150 kW
Temperature deviation:	$\pm 1^{\circ}\text{C}$
Max operating temperature:	250°C