


Reference No.: 6.43

Oil pre-heater

Pre-heaters facilitate the pre-heating of recycled fuel oil (RFO), so that it can be supplied as a fuel to industrial burner systems.

The pre-heating of RFO is carried out indirectly using electrically heated Glycol/water mixture. For this RFO is removed from an hydraulic shunt before the burner section, taken through a heat exchanger and subsequently returned to the hydraulic shunt. The pressure in burner section is not altered by this switching.

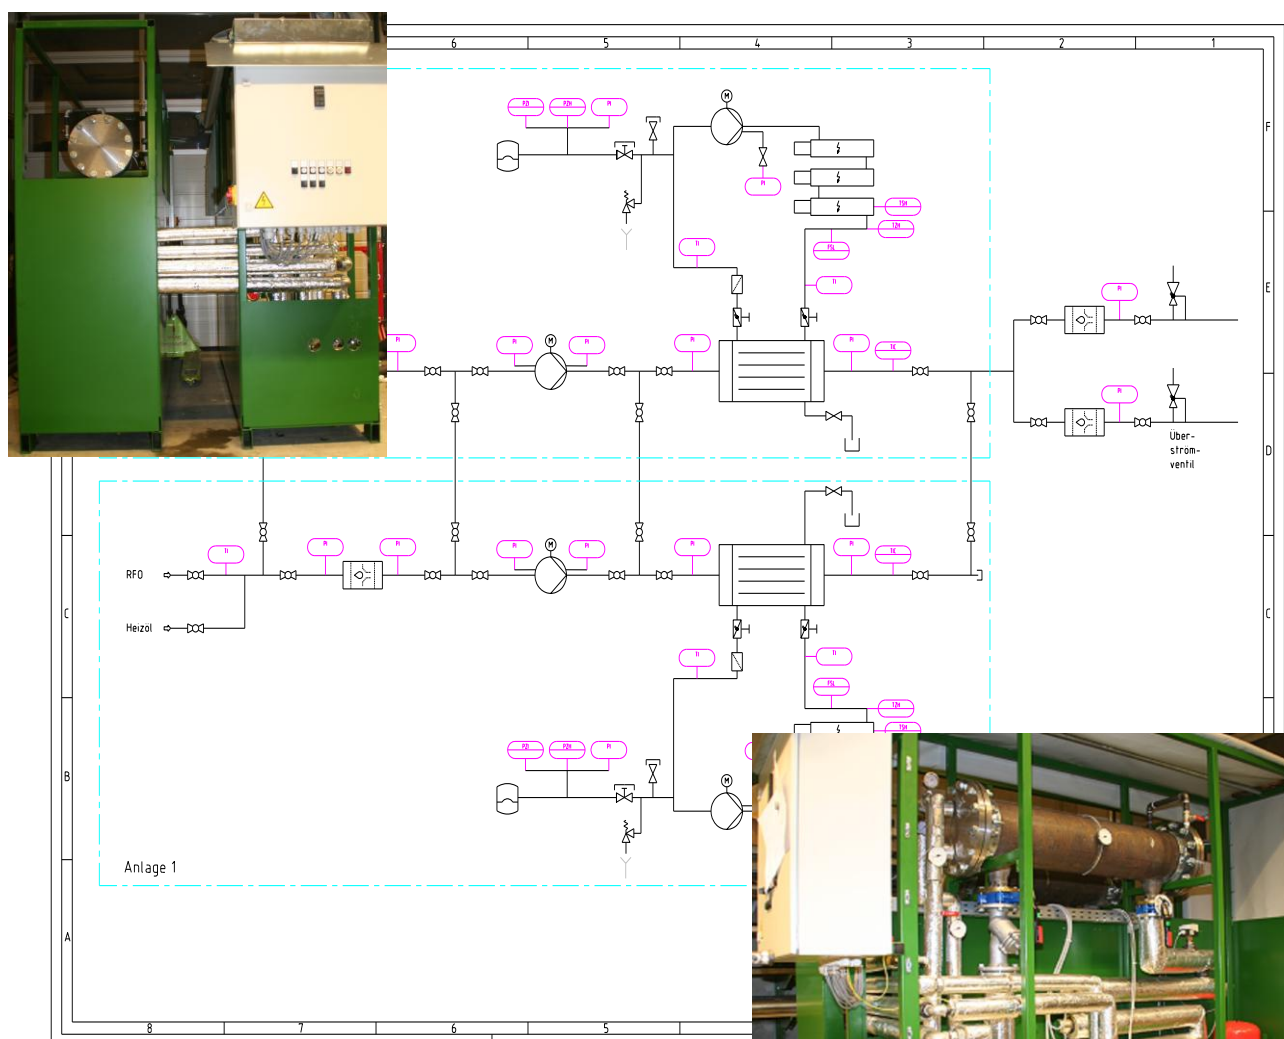

Technical data:

Thermal output: 2 x 30 kW